



Variant	Bordemhætte - 89 cm - Sort blank/rød LED - 800 m3 motor	
Design	Falmec Lab	
Sortiment	Madlavning	
TEKNISK BESKRIVELSE		
Materiale/Finish	Blankt sort glaskeramik	Fotografiet er udelukkende informativt Korresponderer ikke nødvendigvis tmed den valgte model
Funktioner	Timer. Minutur Mulig fuldautomatisk emhætte Motoriseret flapsystem Fedt- og lugtfilterkurv med væskeopsamlingsbakke Flex zone System til justering af motorposition for at optimere skabsplads	
Betjening	Tryk på skyderen 9 varmetrin + powerfunktion (Dobble boost)	
Tilstand	Aftræk / Recirkulation	
Filter	Vaskbare rustfrie fedtfilter Regenererbart Carbon.Zeo Microtech-filter (valgfrit)	
Sugestyrke	Power level management from 2.8kW to 7.4kW	
Motor	Børsteløs motor	
Dimensioner	90 cm	
Tilberedningsfunktioner	Restvarme indikator Genskab funktion: Genskaber indstillinger i tilfælde af fejlagtig slukning Hold varm funktion Automatisk gryde sensor Automatisk sluk-sensor for hver kogezone Børnesikring Pause og genkald Dobbelt brofunktion Chef Funktion: Power management på kogezoneerne	
Notes		
FORBRUG OG TILSLUTNINGSMULIGHER		
Maksimalt forbrug	7560 W	
Spænding/Frekvens	220-240V/380-415V 3N 50-60Hz	
MOTOR		
Motor	Børsteløs motor 800 m³/h	
Maksimal kapacitet	640 m³/h I.E.C.61591	
Maksimalt støjniveau	65 dB (A)re1pW I.E.C. 60704-2-13	
Energiklasse	A+++	
VÆGT OG VOLUMEN		
Bruttovægt	35.5 kg	
Nettovægt	30.3 kg	
Volumen	0.29 m3	
Mål på emballage	L 980 x H 482 x P 615 mm	

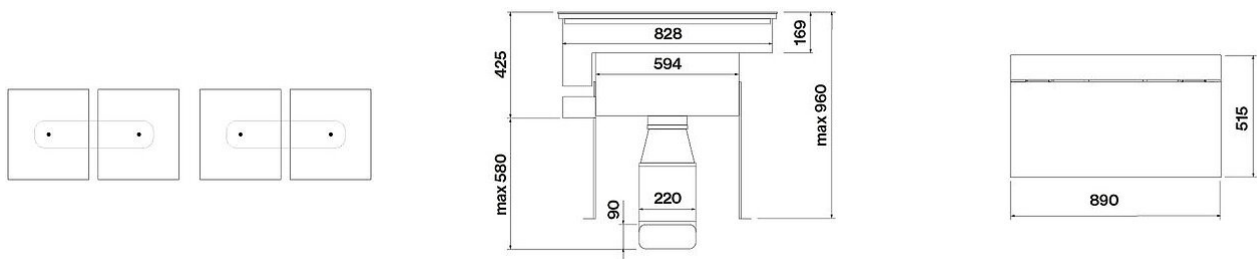


Fra top

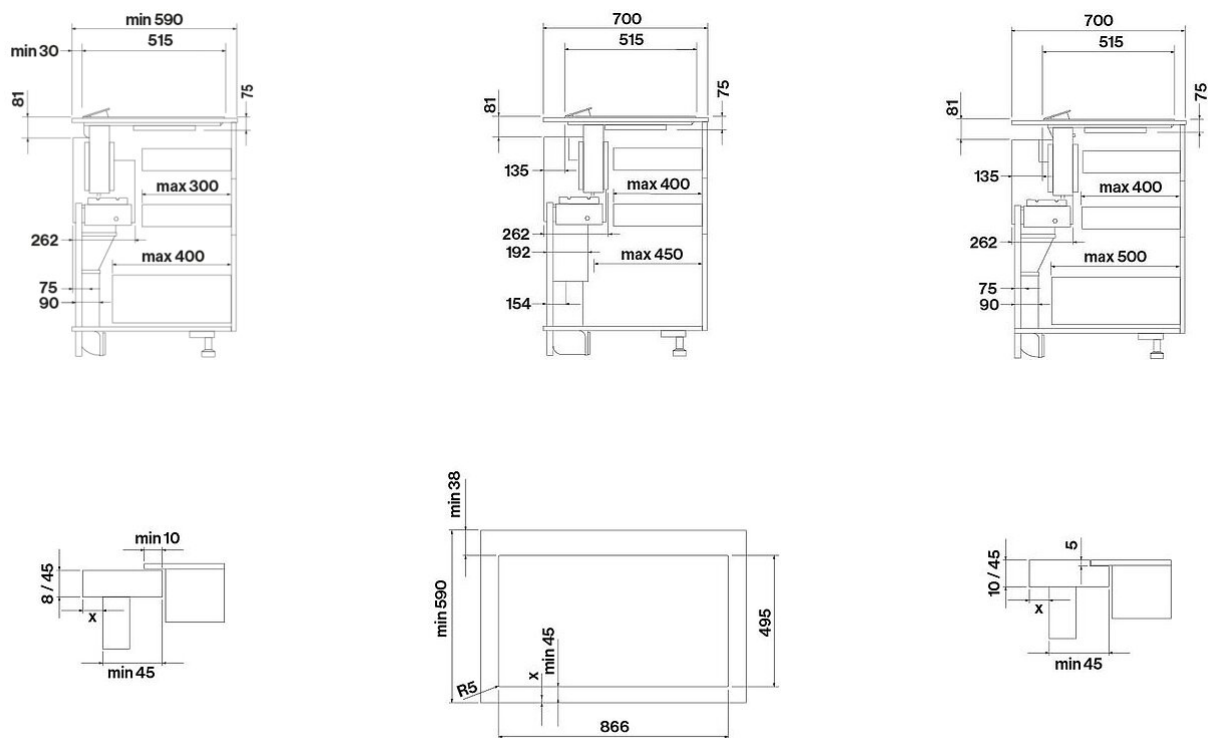

Over top installation

Flush installation

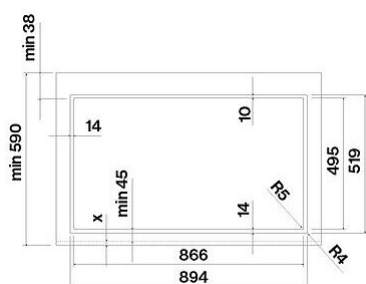

MULIGHEDER FOR TILVALG

Kode	Beskrivelse
KACL.1026	KACL-1026 - Støjreducerende tilbehør
KACL.1054	KUL-1054 - Kulfilter regenererbart - Zeo Microtech 2 stk.


MULIGHEDER FOR TILVALG


Kode	Beskrivelse
KACL.1088	Ducting kit with grid H 6 cm for plinth (Brera, Level One, Level Invisible, Level)
KACL.1089	Ducting kit with grid H 10 cm for plinth (Brera, Level One, Level Invisible, Level)

MOTORENS SPECIFIKATIONER

Motorhastighed	1	5	9	10
Støjniveau dB(A)re1pW-I.E.C.60704-2-13	44	57	65	66
Kapacitet	254	460	640	690
Maksimalt tryk (Pa)	200	650	670	680
Motor sugestyrke (W)	11	50	110	150
Luftudtag	150	150	150	150

KAPACITET/TRYK

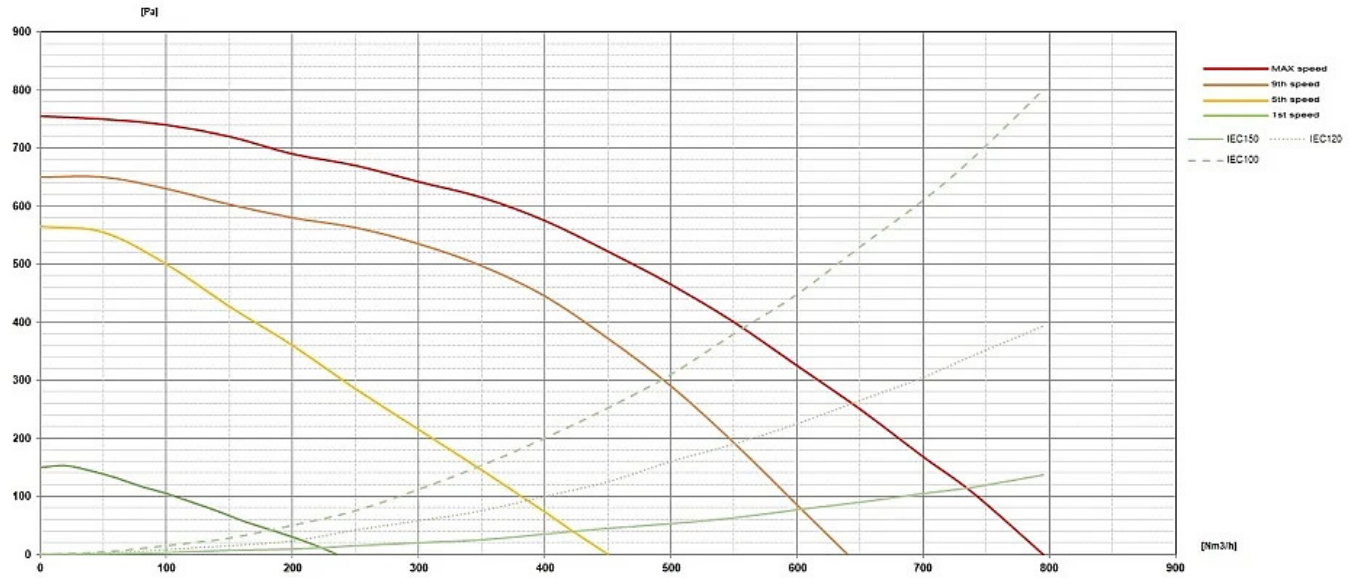

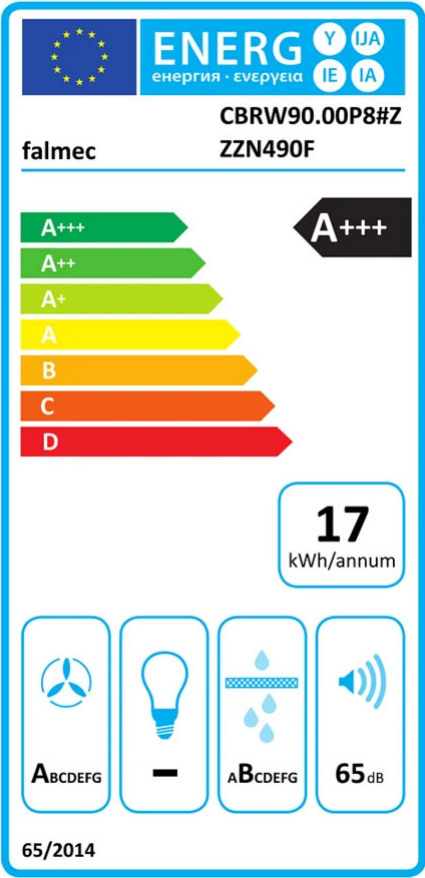

PF		
S	Falmec Lab	
M	Bordemhætte - 89 cm - Sort blank/rød LED - 800 m3 motor	
AEC	16.50	kWh/a
EEC	A+++	
FDE	43.40	
FDEC	A	
LE	0.00	
LEC		
GFE	87	
GFEC	B	
Qmin	254	m³ /h
Qmax	640	m³ /h
Qboost	690	m³ /h
SPEmin	44	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.40	
EEL	21.30	
Qbep	384	m³ /h
Pbep	460	Pa
Qboost	690	m³ /h
Wbep	113	W
WL	0.00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).

PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.